

# Multiscale Modeling Of Pressure-Driven Processes In Large Fracture-Based Energy Storage Systems

V. McGuire<sup>1</sup>, M.A. Rivas<sup>1</sup>, D. Simpkins<sup>1</sup>, L. Ring<sup>1</sup>

<sup>1</sup>Sage Geosystems

## Abstract

This study presents a model for simulating a subsurface pumped-hydro energy storage (battery) system. The model captures the coupling between fluid flow in an oil and gas type wellbore connected to a large hydraulic fracture embedded in a low-permeability reservoir. By integrating wellbore transport dynamics with fracture geomechanics, this work provides a robust framework for evaluating the performance of subsurface systems where pressure-driven energy storage mechanisms are dominant.

The model is implemented in COMSOL Multiphysics using coupled physics domains with independently structured meshes to address differing spatial and physical scales. Fluid flow in the 2D circular Penny-shaped fracture domain is governed by Darcy's Law and resolved with a fine mesh to capture steep pressure gradients, while the surrounding 3D reservoir is modeled using solid mechanics with a coarser mesh to capture deformation and stress redistribution. These domains are coupled through interface conditions that enforce mass and energy continuity, enabling simultaneous solution. Storage metrics including capacity, duration, power output, and round-trip efficiency are evaluated through parameter sweeps on fracture aperture and pressure conditions. Boundary conditions incorporate hydrostatic gradients and frictional losses to represent source point behavior through analytical formulations.

The results characterize system behavior across a range of operating scenarios and provide a basis for evaluating design tradeoffs in subsurface energy storage configurations. This computational framework demonstrates the viability of multi-physics approaches for complex geomechanical energy storage applications.

## Reference


- Aliyu, M.D. and Archer, R.A.: Numerical Simulation of Multifracture HDR Geothermal Reservoirs, *Renewable Energy* 164 (2021) 541-555.
- Bunger, A.P., Lau, H., Wright, S. and Schmidt, H., "Mechanical Model for Geomechanical Pumped Storage in Horizontal Fluid-Filled Lenses." *International Journal for Numerical and Analytical Methods in Geomechanics*, Vol. 47, Issue 8 (2023)
- Al Balushi, F. and Dahi Taleghani, A. "Geomechanical Considerations for Hydro Energy Storage in Fractured Wells." Paper SPE 221405-MS presented at SPE Energy Transition Symposium, Houston, Texas 12-14 August 2024.
- Detournay, R., Peirce, A., and Bunger, A.: Viscosity-dominated Hydraulic Fractures, *Proceedings of the 1st Canada-US Rock Mechanics Symposium – Rock Mechanics Meeting Society's Challenges and Demands*, 2 (2007) 1649-1656.
- Gong, F., Guo, T., Sun, W., Li, Z., Yang, B., Chen, Y. and Qu, Z.: Evaluation of Geothermal Energy Extraction in Enhanced Geothermal Systems (EGS) with Multiple Fracturing Horizontal Wells (MFHW), *Renewable Energy* 151 (2020), 1339-1351.
- Merzoug, A., Zhang, J., and Okoroafor, E.R.: Investigating the Feasibility of a Geothermal Huff-n-Puff: Implications for Enhanced Geothermal Systems, *GRC Transactions*, Vol. 47 (2023).
- Rivas, M.A., McGuire, V., Simpkins, D. and Ring, L., "Geopressured Geothermal Systems: An Efficient and Sustainable Heat Extraction Method." *GRC Transactions*, Vol. 48 (2024).
- Rivas, M.A., Simpkins, D., McGuire, V. and Ring, L., "Dynamics of Thermal Migration in Pressure-Propped Fractures During Huff-n-Puff Operations." *Proceedings, 50th Workshop on Geothermal Reservoir Engineering*, Stanford University, Stanford, CA (2025).
- Safari, M.R. and Ghassemi, A.: 3D Analysis of Huff and Puff Injection Tests in Geothermal Reservoirs, *Proceedings, 36th Workshop on Geothermal Reservoir Engineering*, Stanford University, Stanford, CA (2011).
- Schmidt, H., Wright, S., Mauroner, C., Lau, H., Hill, B., Zhou, J. and Bunger, A., "Geomechanical Pumped Storage in Hydraulic Fractures." *SPE Hydraulic Fracturing Technology Conference and Exhibition, OnePetro* (2023).
- Simpkins, D., Rivas, M.A., Eros, M. and Ring, L. "Energy Storage in Deep Hydraulic Fractures: Mathematical Model and Field Validation." *GRC Transactions*, Vol. 47 (2023).

Tischner, T., Evers, H., Hauswirth, H., Jatho, R., Kosinowski, M. and Sulzbacher, H., "New Concepts for Extracting Geothermal Energy from One Well: The GeneSys-Project." Proceedings World Geothermal Congress 2010, Bali, Indonesia (2010).


Tischner, T., Krug, S., Pechan, E., Hesshaus, A., Jatho, R., Bischoff, M. and Wonik, T., "Massive Hydraulic Fracturing in Low Permeable Sedimentary Rock in the GeneSys Project." Proceedings 38th Workshop on Geothermal Reservoir Engineering, Stanford University, Stanford (2013).

Wessling, S., Junker, R., Rutqvist, J., Silin, D., Sulzbacher, H., Tischner, T. and Tsang, C-F., "Pressure Analysis of the Hydromechanical Fracture Behaviour in Stimulated Tight Sedimentary Geothermal Reservoirs." Geothermics 38 (2009).


## Figures used in the abstract

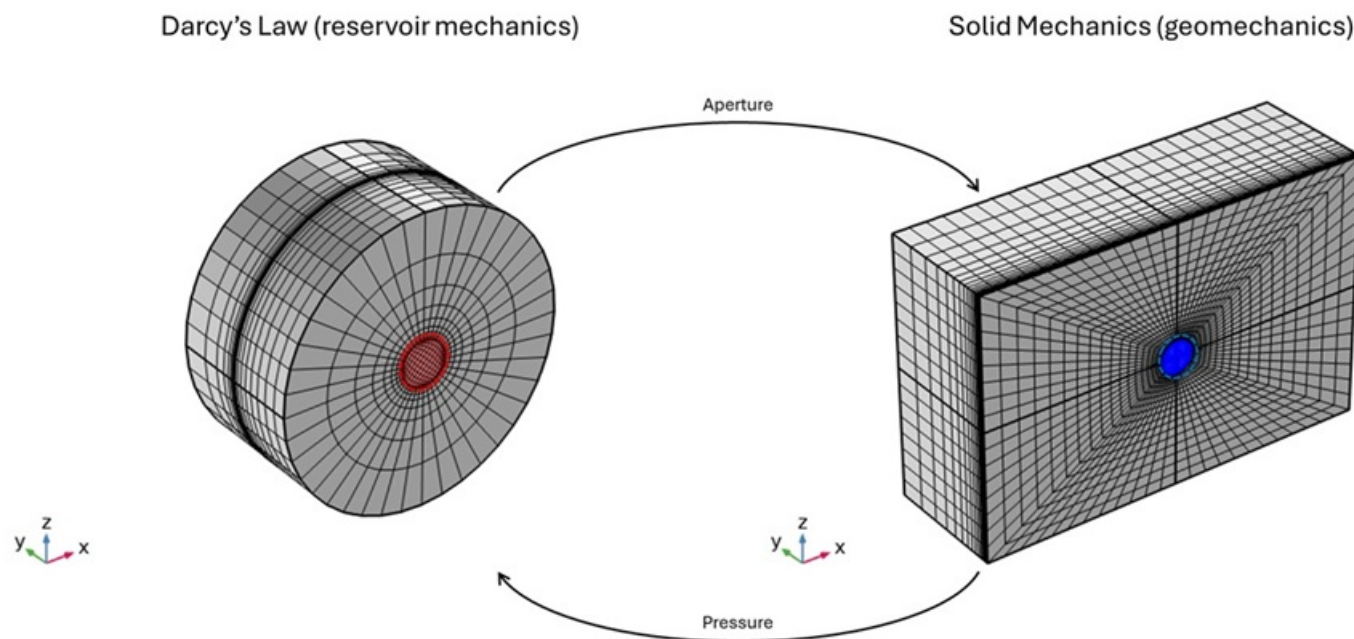

**Figure 1 :** Figure 1: Multiscale COMSOL model with separate meshes. Darcy domain (left) uses fine radial mesh for fluid transport; solid mechanics (right) uses coarse 3D mesh for rock deformation. Interface coupling maps fracture geometry with continuity conditions.

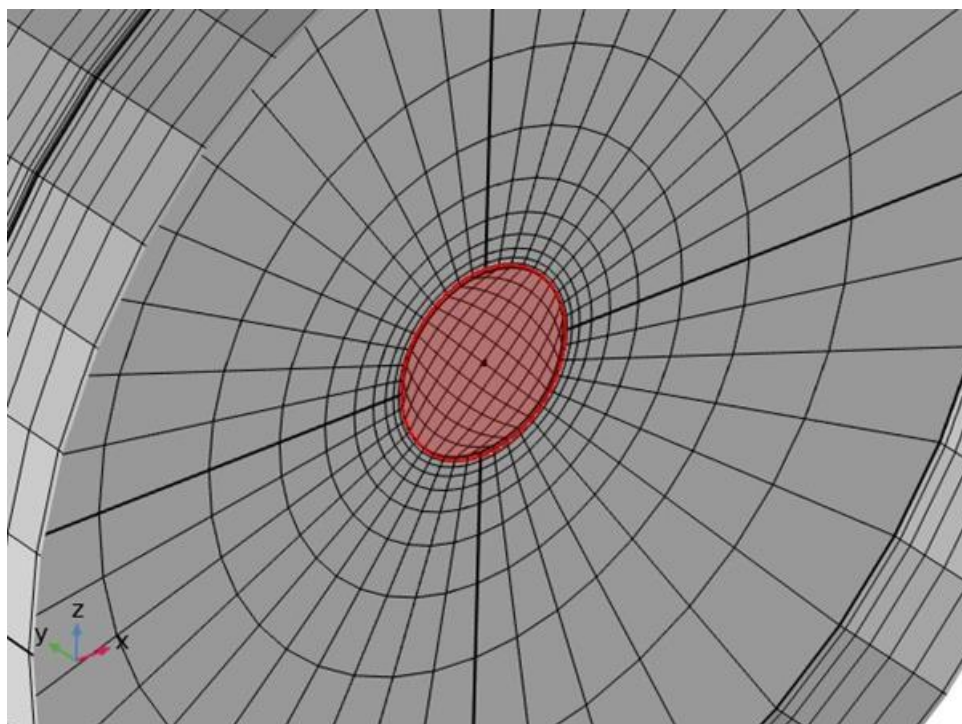

**Figure 2 :** Figure 2: Cross-sectional view of 2D fracture domain (highlighted) with radial mesh refinement. Darcy's Law governs fluid transport with high-resolution discretization near wellbore connection point.

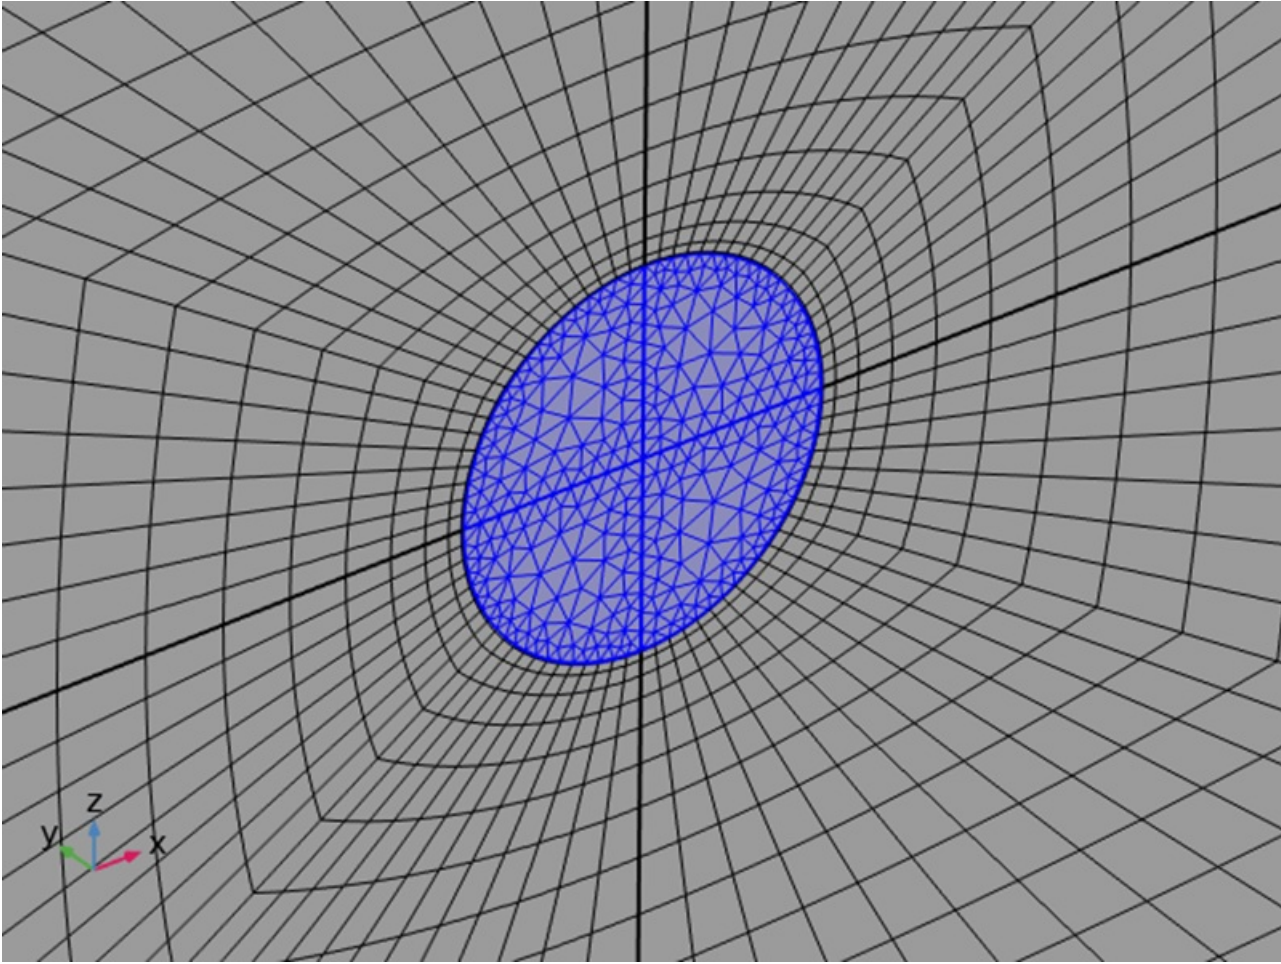

**Figure 3 :** Figure 3: Coupled interface showing fracture cavity mapped to equivalent geometry for solid mechanics analysis. Interface conditions enforce mass and energy continuity between fluid and solid domains.